

# 2 Way-90° Power Splitter

QCV-271+

50Ω 150 to 265 MHz



CASE STYLE: JV1210C-1

## The Big Deal

- High Power handling (10W)
- Low Unbalance, 0.5 dB & 4 deg. typ.
- Industry leading combination of size/bandwidth

## Product Overview

Mini-Circuits new 90° Power Splitter, model QCV-271+, offers an industry leading combination of operating bandwidth and size; supporting nearly an octave band in a miniature EIA-1210 form factor. The outstanding phase and amplitude unbalance make this component a versatile building block for use in a variety of systems and sub-system designs.

## Key Features

Feature	Advantages
Small Size	Offered in the EIA-1210 package size, the QCV-271+ offers an industry leading combination of size, bandwidth and frequency. The small footprint (3.2mm x 2.0mm) allows for reduced parasitics in systems with improved performance and simplified layout.
Low Phase and Amplitude Unbalance	Supporting 4 deg. and 0.5 dB unbalance make this 90° hybrid applicable for use in higher level integrated components such as image reject mixers, single sideband modulators, phase shifters, variable attenuators, and balance amplifiers.
High Power Handling	Capable of operating up to 10W, the LTCC construction of the QCV-271+ makes this 90° hybrid a robust, rugged product that can be used effectively in either the transmit or receive paths.



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs  
& shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Power Splitter/Combiner

2 Way-90° 50Ω 150 to 265 MHz

## QCV-271+



CASE STYLE: JV1210C-1  
PRICE: \$6.95 ea. QTY (20)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W* max.

\* Derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3


### Outline Drawing

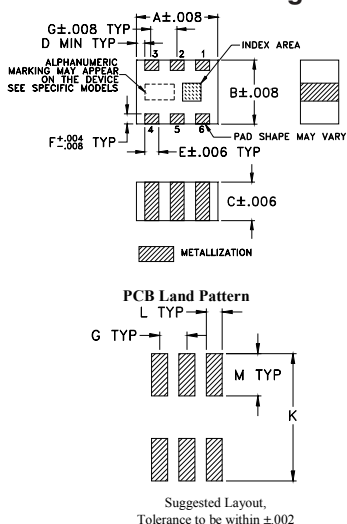

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.126	.098	.059	.004	.022	.016	.039
3.2	2.5	1.50	0.1	0.56	0.4	1.0
H	J	K	L	M	wt	
-	-	.177	.024	.059	grams	
-	-	4.5	0.6	1.5	0.03	

### Demo Board MCL P/N: TB-610+ Suggested PCB Layout (PL-340)

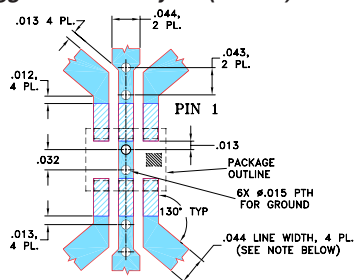

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- Denotes PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- Denotes COPPER LAND PATTERN FREE OF SOLDER MASK.

### Features

- low insertion loss, 0.5 dB typ.
- high isolation, 20 dB typ.
- ultra small size, 0.12x0.10x.059"
- wrap-around terminal for excellent solderability


### Applications

- I&Q modulators
- image reject mixers
- balanced amplifiers
- marine radio

### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		150		265	MHz
Insertion Loss (avg of coupled outputs above 3 dB)	150-185	—	0.4	0.7	dB
	185-230	—	0.5	0.8	
	230-265	—	0.9	1.0	
Isolation	150-185	16	18	—	dB
	185-230	16	17	—	
	230-265	14	16	—	
Phase Unbalance	150-185	—	3.5	8	Degree
	185-230	—	3.2	8	
	230-265	—	2.0	8	
Amplitude Unbalance	150-185	—	1.0	1.4	dB
	185-230	—	0.4	0.6	
	230-265	—	0.7	1.4	
VSWR (Port S)	150-185	—	1.2	1.4	:1
	185-230	—	1.2	1.4	
	230-265	—	1.3	1.5	
VSWR (Port 1-2)	150-185	—	1.18	1.3	:1
	185-230	—	1.21	1.4	
	230-265	—	1.34	1.5	

### Electrical Schematic



**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M130685  
QCV-271+  
ED-13423C/3  
AD/CP/AM  
120301  
Page 2

## Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
150.00	2.94	3.97	1.02	19.96	85.65	1.17	1.21	1.18
155.00	3.03	3.88	0.85	19.96	85.60	1.17	1.21	1.18
160.00	3.10	3.80	0.70	20.00	85.54	1.17	1.21	1.18
165.00	3.17	3.73	0.56	20.01	85.49	1.17	1.21	1.18
170.00	3.23	3.67	0.43	20.07	85.46	1.16	1.21	1.18
180.00	3.35	3.57	0.22	20.16	85.39	1.16	1.22	1.19
190.00	3.44	3.50	0.06	20.25	85.35	1.16	1.22	1.19
200.00	3.51	3.45	0.05	20.32	85.33	1.16	1.22	1.20
210.00	3.56	3.44	0.11	20.36	85.33	1.17	1.23	1.21
220.00	3.58	3.46	0.12	20.38	85.36	1.18	1.24	1.23
230.00	3.58	3.52	0.06	20.38	85.44	1.20	1.25	1.25
240.00	3.55	3.62	0.06	20.32	85.57	1.22	1.26	1.28
250.00	3.50	3.76	0.26	20.16	85.79	1.26	1.28	1.31
260.00	3.43	3.97	0.53	19.87	86.15	1.30	1.31	1.35
265.00	3.39	4.09	0.70	19.66	86.40	1.33	1.32	1.38

1. Total Loss = Insertion Loss + 3 dB splitter loss.

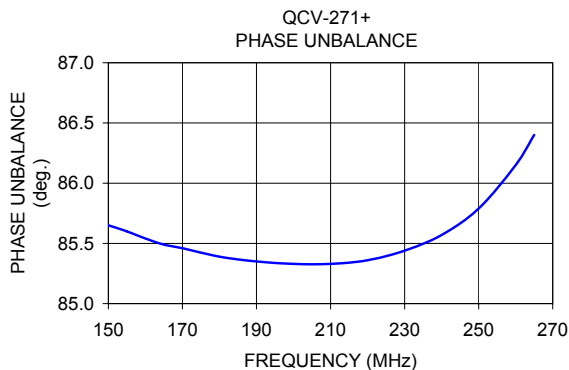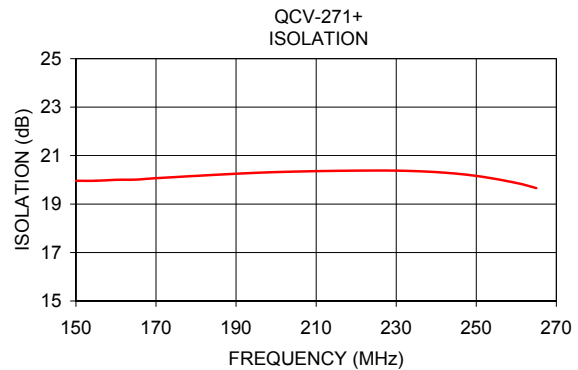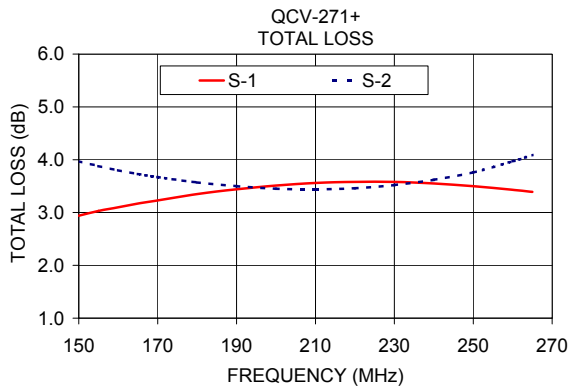

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).