

Surface Mount

Voltage Controlled Oscillator

5V Tuning for PLL IC's 1520 to 1560 MHz

MOS-1560-119+



Features

- Linear tuning characteristics
- Low phase noise
- Low pushing
- Aqueous washable

Applications

- Wireless communications
- CATV

CASE STYLE: CZ682

PRICE: \$ 20.45 ea. QTY (5-49)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.



Electrical Specifications

MODEL NO.	FREQ. (MHz)	POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz	TUNING				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)	PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc Current (volts) (mA)
				VOLTAGE RANGE (V)	SENSITIVITY (MHz/V)	PORT CAP (pF)	3 dB BANDWIDTH (MHz)					
	Min. Max.	Typ.	1 10 100 1000	Min. Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Max.
MOS-1560-119+	1520 1560	+8.5	-83 -110 -131 -151	0.5 5	27	24	60	-90	-18 -10	3	0.5	5 37

Pin Connections

RF OUT	5
VCC	3
V-TUNE	1
GROUND	2,4,6,7,8

Outline Drawing

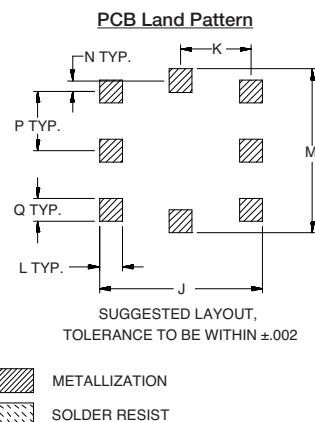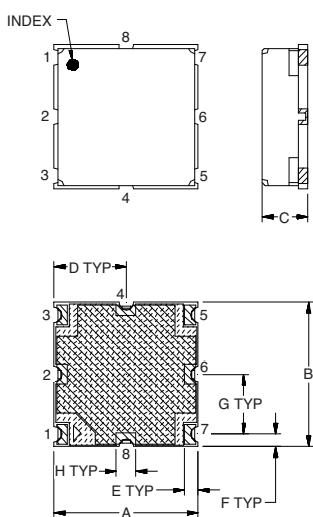


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Demo Board MCL P/N: TB-128 Suggested PCB Layout (PL-023)

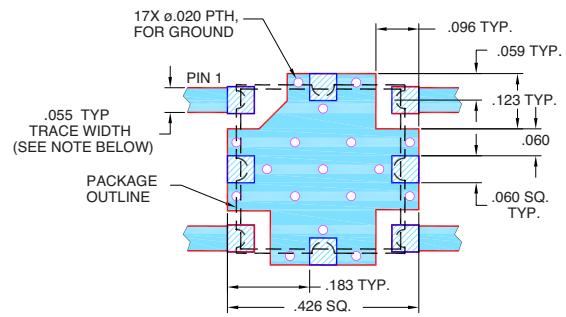

NOTES:

1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS $0.030" \pm 0.002"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT	GRAM
.375	.375	.131	.188	.035	.033	.154	.050	.425	.183	.060	.425	.028	.154	.060	0.60	

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Performance Data & Curves*

MOS-1560-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1540 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	35.78	1473.9	1468.3	1466.1	9.53	9.04	8.86	30.25	-21.2	-21.4	-41.1	1.06	2.95	-79.7	-108.7	-130.4	-150.3	1.0	-84.15
0.25	32.30	1482.3	1477.3	1475.2	9.45	8.97	8.80	30.24	-21.1	-20.0	-39.7	0.80	3.06	-81.9	-109.1	-130.6	-150.8	2.0	-93.50
0.50	30.60	1490.2	1485.3	1483.4	9.38	8.90	8.73	30.23	-20.5	-21.5	-39.6	0.67	2.69	-82.0	-110.2	-131.1	-150.7	3.5	-99.99
0.75	29.40	1497.7	1493.0	1491.0	9.32	8.84	8.67	30.23	-20.1	-22.1	-38.3	0.57	2.78	-82.8	-110.5	-130.9	-150.7	6.0	-105.42
1.00	28.87	1505.0	1500.3	1498.4	9.26	8.80	8.62	30.22	-19.9	-22.3	-38.6	0.50	2.88	-84.2	-110.5	-130.7	-150.8	8.5	-108.84
1.50	28.02	1519.3	1514.7	1512.7	9.16	8.70	8.52	30.24	-19.4	-22.7	-36.3	0.42	3.17	-84.9	-109.7	-130.9	-151.1	10.0	-110.27
1.75	27.80	1526.3	1521.7	1519.7	9.11	8.66	8.48	30.25	-19.1	-24.3	-37.2	0.40	3.42	-84.9	-110.2	-131.4	-151.1	20.8	-117.19
2.00	27.66	1533.3	1528.6	1526.7	9.06	8.61	8.44	30.25	-18.7	-26.8	-35.3	0.38	3.36	-83.2	-110.4	-130.8	-150.5	35.5	-121.95
2.25	27.49	1540.2	1535.5	1533.6	9.01	8.58	8.40	30.25	-18.6	-24.4	-35.2	0.36	2.96	-81.9	-110.9	-131.1	-151.0	60.7	-125.84
2.50	27.58	1547.1	1542.4	1540.5	8.94	8.53	8.37	30.25	-18.3	-24.9	-34.5	0.34	2.81	-84.8	-110.5	-130.5	-150.8	86.7	-129.67
3.00	27.79	1561.0	1556.2	1554.2	8.83	8.44	8.27	30.25	-17.6	-27.4	-33.5	0.32	2.23	-82.6	-110.0	-130.7	-150.9	100.0	-130.98
3.25	27.91	1568.0	1563.2	1561.1	8.76	8.39	8.23	30.25	-17.5	-26.3	-33.3	0.32	2.31	-83.7	-111.2	-130.9	-151.0	177.0	-135.91
3.50	28.09	1575.1	1570.1	1568.1	8.68	8.33	8.18	30.24	-17.4	-28.6	-33.7	0.32	2.58	-85.3	-110.2	-130.8	-150.4	211.6	-137.49
3.75	28.18	1582.2	1577.2	1575.1	8.64	8.28	8.11	30.24	-17.3	-28.9	-32.2	0.31	2.59	-83.3	-109.7	-130.4	-150.6	302.4	-140.62
4.00	28.18	1589.3	1584.2	1582.1	8.59	8.24	8.08	30.25	-17.0	-28.0	-32.5	0.32	3.08	-84.2	-110.3	-131.0	-150.7	361.5	-141.89
4.25	28.26	1596.4	1591.2	1589.2	8.53	8.20	8.04	30.24	-16.7	-28.9	-31.5	0.32	3.37	-84.1	-110.0	-130.9	-150.7	507.5	-145.12
4.50	28.33	1603.5	1598.3	1596.2	8.46	8.15	7.99	30.24	-16.6	-28.9	-31.2	0.33	3.36	-84.6	-110.3	-131.2	-150.3	606.7	-146.53
4.75	28.51	1610.7	1605.4	1603.3	8.40	8.10	7.95	30.23	-16.4	-28.8	-31.4	0.33	3.03	-83.4	-109.9	-130.9	-150.9	851.6	-149.58
5.00	28.63	1617.9	1612.5	1610.4	8.34	8.06	7.90	30.23	-16.3	-29.0	-30.4	0.33	2.87	-82.5	-110.4	-131.2	-150.9	1000.0	-150.95

*at 25°C unless mentioned otherwise

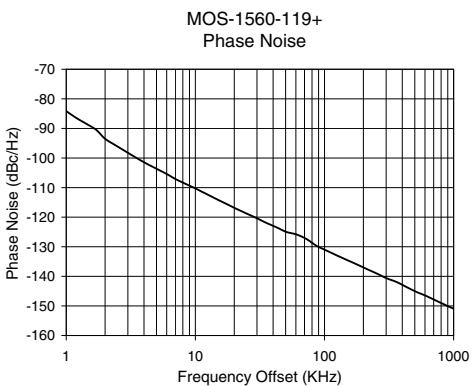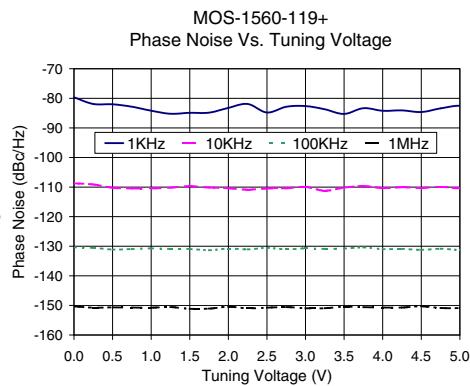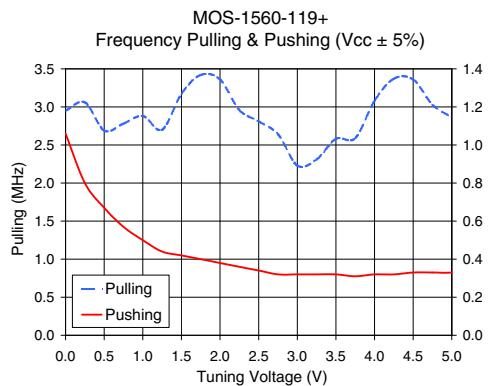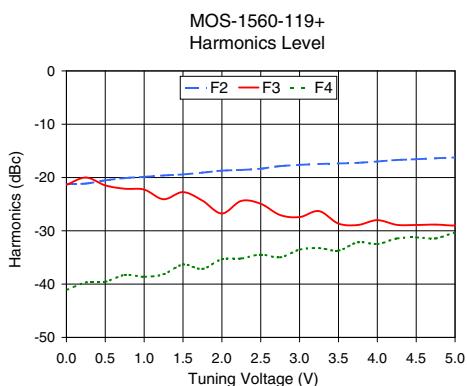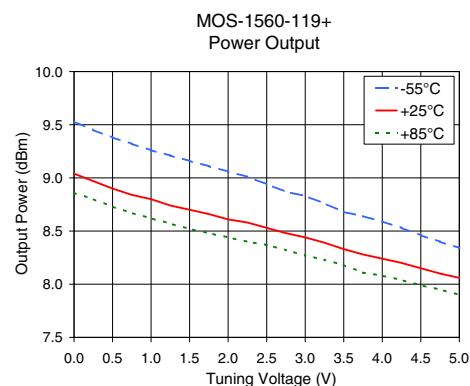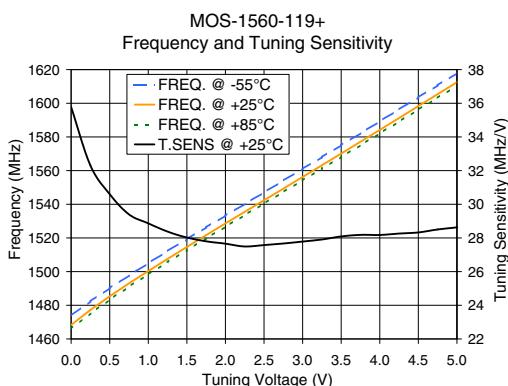

ISO 9001 ISO 14001 AS 9100 CERTIFIED



Packaging



RoHS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test, performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.