

Surface Mount Power Splitter/Combiner

SP-2P+

2 Way-0° 50Ω

1710 to 1990 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	2,4,6


Outline Drawing

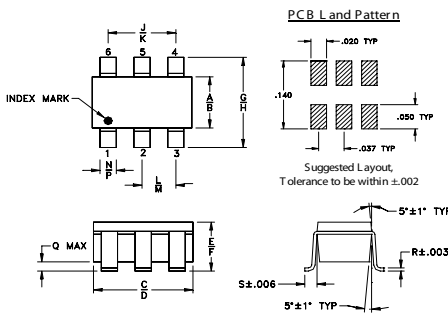

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
.052	.067	.106	.122	.035	.064	.087	.118	.067	.083	.033	.042	.012	.020	.012	.006	.018	grams
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70	2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

Demo Board MCL P/N: TB-374 Suggested PCB Layout (PL-232)

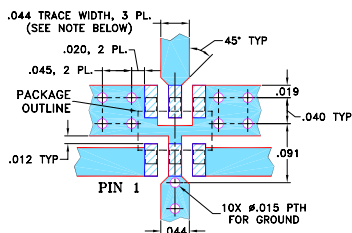

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- Denotes PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- Denotes COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.4 dB typ.
- good isolation, 28 dB typ.
- excellent output VSWR, 1.15:1 typ.
- excellent power handling, 1.5W
- small size
- aqueous washable

Applications




- PCS/DCS
- communication systems
- GSM

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Typ.	Min.	Typ.	Max.			S-Port Typ.	Output-Ports Typ.
1710-1990	28	18	0.4	0.8	3.5	0.2	1.23	1.15

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1710.00	3.41	3.39	0.01	22.82	0.43	1.21	1.00	1.02
1720.00	3.41	3.39	0.01	23.50	0.44	1.20	1.01	1.03
1740.00	3.41	3.40	0.01	25.04	0.44	1.20	1.03	1.04
1760.00	3.41	3.40	0.01	26.88	0.45	1.20	1.04	1.06
1800.00	3.42	3.41	0.01	31.98	0.46	1.20	1.07	1.09
1820.00	3.42	3.42	0.01	35.26	0.47	1.21	1.09	1.10
1840.00	3.43	3.42	0.01	36.95	0.48	1.21	1.10	1.12
1860.00	3.43	3.43	0.01	34.67	0.48	1.22	1.12	1.13
1880.00	3.44	3.44	0.00	31.44	0.49	1.23	1.13	1.15
1900.00	3.45	3.45	0.00	28.80	0.50	1.25	1.15	1.16
1920.00	3.46	3.45	0.00	26.70	0.50	1.26	1.17	1.18
1940.00	3.47	3.47	0.00	24.97	0.51	1.28	1.18	1.20
1960.00	3.48	3.48	0.00	23.50	0.52	1.29	1.20	1.21
1980.00	3.49	3.49	0.00	22.23	0.54	1.31	1.22	1.23
1990.00	3.49	3.50	0.00	21.67	0.56	1.32	1.22	1.24

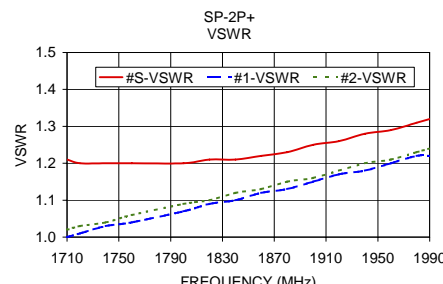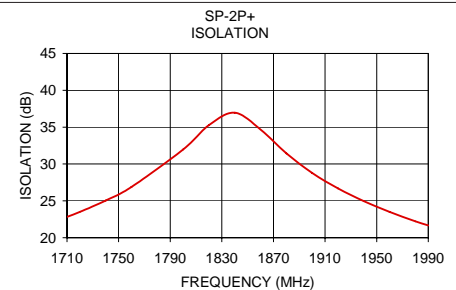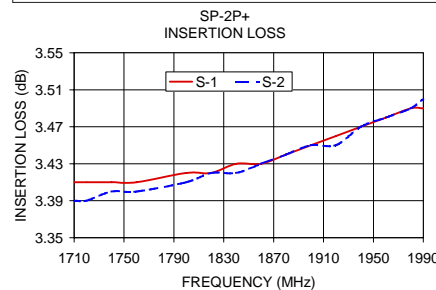

electrical schematic

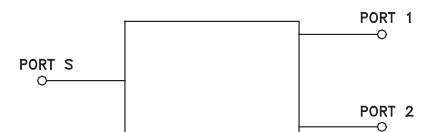

ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

For detailed performance specs & shipping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M107210
ED-12348C/2+
SP-2P+
RS/LC/CP/AM
090129